


iDISPLAY™ Tablet 13.3" UIT413



The iDISPLAY Tablet 10.1" is designed as an interactive display for any location. Operating on an Android operating system and powered by Pulse technology, this slim and elegant display includes all of the solutions needed for commercial locations. Attach to any standard TV/monitor VESA bracket and simply turn on the power. It is a fully interactive commercial display that uses capacitive touch, built in WiFi and LAN, and a host of integrated features that work in either landscape or portrait format. With the option to expand to 3G services*, this is an amazing, interactive digital display that creates an engaging, memorable consumer experience.

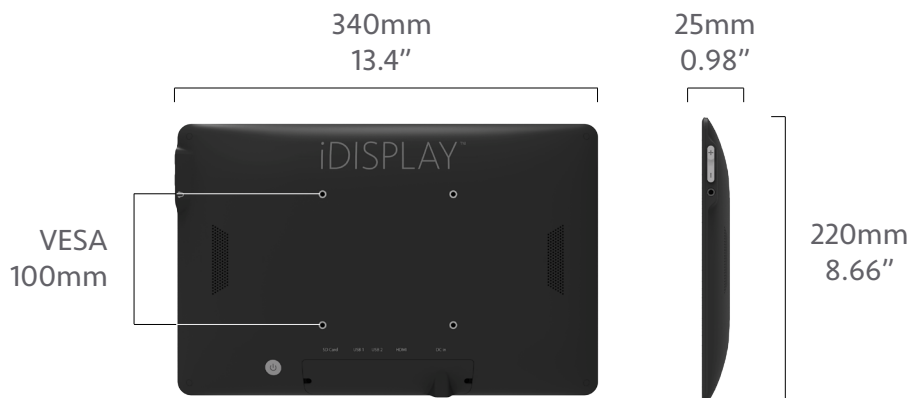

*3G Optional, pending carrier compatibility/availability.
For more information about iDISPLAY Tablets please
visit our website: www.outform.com/idisplay

OUTFORM™

Panel Information	Screen Size	13.3"
	Resolution	1920 x 1080 Pixels
	Brightness	300 cd/m ²
	Contrast Ratio	1000
	Aspect Ratio	16:9
	Active Area Size (WxH)	293.76 x 165.24mm
	Viewing Angle Touch	90°/90°(H), 90°/90°(V)
	Touch Technology	Capacitive G+G 10 point
Hardware and OS	CPU	RK3188, Cortex-A9, up to 1.6GHz Quad Core
	GPU	Mali 400 MP4, 600MHz
	Internal Memory	1GB, DDR3
	Flash Memory	16GB
	Operating System	Android 4.4 / 5.0
	Battery	Option 1: Li 3.7V 5000*2/10000MAH
		Option 2: RTC battery
Video/Images	Video Formats	3GP, MP4, AVI, MKV, FLV, MOV, RM, RMVB
	Video Codecs	MPG-1, MPG-2, MPG-4, H.263, H.264, VC-1, RV, VP6/VP8, MVC
	Image Formats	JPG/JPEG, PNG, BMP
	HDMI Output	Mini HDMI
	Playback Software	Built-in software allows for easy setup of a playlist of videos and/or stills which can be looped infinitely without any additional software. Alternatively, any installed app can be auto-started upon boot-up.
Audio	Speakers	2W x 2
	Audio Codecs	MP3, WMA, AAC, FLAC, WAV
Communications	Bluetooth	4.0
	Wi-Fi	802.11 b/g/n 2.4GHz
	Wired Ethernet	Through external 100M/1000M USB dongle (Optional)
	Wireless 3G	Through external USB dongle (Optional)
General information	Color	Black (Standard), White (Optional)
	Camera	N/A
	I/O ports	DC, SD/TF Card, mini HDMI, Microphone, 3.5mm Audio Output Jack, USB 2.0 Host x 1, USB 2.0 OTG x 1
	Included in Box	Display Unit, Power Adapter, Power Cable, User Manual, Warranty
	Optional Accessories	Floor stand, Counter stand (L), Shelf clip, Adjustable shelf clip, Wall bracket, Rotating bracket
	Sensors	G-Sensor (3-Axis accelerometer)
	Power Input	12V/3A
	Power Consumption	12W (max)
	Power Over Ethernet	N/A
	Operating Temperature	0-40 °C
	Relative Humidity	85%
	Certifications	Display Unit: ROHS, FCC and CE complaint Power Supply Unit: UL, FCC and CE compliant Battery & RTC Battery: UL, UN38.3
Dimensions	Size (L x W x H)	340 x 25 x 220mm
	Product Weight	1.48kg
	Gift Box Size	388 x 78 x 318mm
	Master Carton Size	410 x 410 x 340mm
	Master Carton Weight	12kg
	Units per Master Carton	5pcs